


**ASME Y14.5-2018**  
**(Revision of ASME Y14.5-2009)**

# Dimensioning and Tolerancing

## Engineering Product Definition and Related Documentation Practices

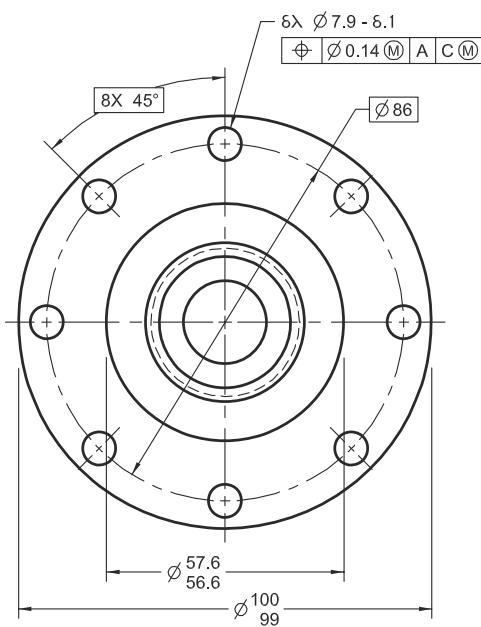

**AN INTERNATIONAL STANDARD**



**The American Society of  
Mechanical Engineers**

This is a preview. Click here to purchase the full publication.

## ADOPTION NOTICE

ASME Y14.5, Dimensioning and Tolerancing, was adopted on 9 February 2009 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, U.S. Army Research, Development and Engineering Center (ARDEC), ATTN: AMSRD-AAR-QES-E, Picatinny Arsenal, NJ 07806-5000. Copies of this document may be purchased from The American Society of Mechanical Engineers (ASME), 150 Clove Road, 6th Floor, Little Falls, NJ 07424-2139; <http://www.asme.org>.

Custodians:

Army — AR  
Navy — SA  
Air Force — 16

Adopting Activity:

Army — AR  
(Project DRPR-2009-003)

Review Activities:

Army — CR, MI, PT, TM  
Navy — AS, CG, CH, EC, MC, NP, TD  
Air Force — 13, 99  
DLA — DH  
OSD — SE  
NSA — NS  
Other — CM, MP, DC2

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://quicksearch.dla.mil>.

ASMC NVA

AREA DRPR

**DISTRIBUTION STATEMENT A.** Approved for public release, distribution is unlimited.

This is a preview. Click here to purchase the full publication.

**ASME Y14.5-2018**  
(Revision of ASME Y14.5-2009)

# Dimensioning and Tolerancing

---

## Engineering Product Definition and Related Documentation Practices

AN INTERNATIONAL STANDARD



The American Society of  
Mechanical Engineers

Two Park Avenue • New York, NY • 10016 USA

This is a preview. Click here to purchase the full publication.

Date of Issuance: February 11, 2019

This Standard will be revised when the Society approves the issuance of a new edition.

Periodically certain actions of the ASME Y14 Committee may be published as Cases. Cases are published on the ASME website under the Y14 Committee Page at <http://go.asme.org/Y14committee> as they are issued.

Errata to codes and standards may be posted on the ASME website under the Committee Pages to provide corrections to incorrectly published items, or to correct typographical or grammatical errors in codes and standards. Such errata shall be used on the date posted.

The Y14 Committee Page can be found at <http://go.asme.org/Y14committee>. There is an option available to automatically receive an e-mail notification when errata are posted to a particular code or standard. This option can be found on the appropriate Committee Page after selecting "Errata" in the "Publication Information" section.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This international code or standard was developed under procedures accredited as meeting the criteria for American National Standards and it is an American National Standard. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,  
in an electronic retrieval system or otherwise,  
without the prior written permission of the publisher.

The American Society of Mechanical Engineers  
Two Park Avenue, New York, NY 10016-5990

Copyright © 2019 by  
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS  
All rights reserved  
Printed in U.S.A.

This is a preview. Click here to purchase the full publication.

# CONTENTS

Foreword .....	xiv
Committee Roster .....	xv
Correspondence With the Y14 Committee .....	xvi
<b>Section 1 Scope .....</b>	<b>1</b>
1.1 Introduction .....	1
1.2 General .....	1
1.3 Reference to This Standard .....	1
1.4 ASME Y14 Series Conventions .....	1
1.5 Drawings Without Reference to a Standard .....	2
1.6 Reference to Gaging .....	2
1.7 Symbols .....	3
<b>Section 2 References .....</b>	<b>4</b>
2.1 Introduction .....	4
2.2 Cited Standards .....	4
2.3 Additional Sources (Not Cited) .....	4
<b>Section 3 Definitions .....</b>	<b>5</b>
<b>Section 4 Fundamental Rules, Tolerancing Defaults, and Dimensioning Practices .....</b>	<b>12</b>
4.1 Fundamental Rules .....	12
4.2 Units of Measure .....	13
4.3 Types of Dimensioning .....	13
4.4 Application of Dimensions .....	14
4.5 Dimensioning Features .....	15
4.6 Location of Features .....	18
<b>Section 5 Tolerancing, Interpretation of Limits, Limits of Size, and Material Condition Modifiers .....</b>	<b>33</b>
5.1 General .....	33
5.2 Direct Tolerancing Methods .....	33
5.3 Tolerance Expression .....	34
5.4 Interpretation of Limits .....	34
5.5 Single Limit Toleranced Dimensions .....	35
5.6 Tolerance Accumulation Between Surfaces .....	35
5.7 Dimensions Related to an Origin .....	35
5.8 Limits of Size .....	35
5.9 Applicability of Modifiers on Geometric Tolerance Values and Datum Feature References .....	36
5.10 Screw Threads .....	38
5.11 Gears and Splines .....	38
5.12 Boundary Conditions .....	38
5.13 Angular Surfaces .....	38
5.14 Conical Tapers .....	38

5.15	Flat Tapers . . . . .	39
5.16	Radius . . . . .	39
5.17	Tangent Plane . . . . .	39
5.18	Statistical Tolerancing . . . . .	39
<b>Section 6</b>	<b>Symbology . . . . .</b>	<b>54</b>
6.1	General . . . . .	54
6.2	Use of Notes to Supplement Symbols . . . . .	54
6.3	Symbol Construction . . . . .	54
6.4	Feature Control Frame Symbols . . . . .	57
6.5	Feature Control Frame Placement . . . . .	58
6.6	Tolerance Zone Shape . . . . .	58
6.7	Tabulated Tolerances . . . . .	58
<b>Section 7</b>	<b>Datum Reference Frames . . . . .</b>	<b>70</b>
7.1	General . . . . .	70
7.2	Degrees of Freedom . . . . .	70
7.3	Degrees of Freedom Constrained by Primary Datum Features RMB . . . . .	70
7.4	Constraining Degrees of Freedom of a Part . . . . .	70
7.5	True Geometric Counterpart . . . . .	71
7.6	True Geometric Counterparts and Physical Datum Feature Simulators . . . . .	71
7.7	Datum Reference Frame . . . . .	71
7.8	Datum Features . . . . .	72
7.9	Datum Feature Controls . . . . .	72
7.10	Specifying Datum Features in an Order of Precedence . . . . .	72
7.11	Establishing Datums . . . . .	73
7.12	Common Datum Features . . . . .	77
7.13	Mathematically Defined Surface . . . . .	78
7.14	Multiple Datum Reference Frames . . . . .	78
7.15	Functional Datum Features . . . . .	78
7.16	Rotational Constraint About a Datum Axis or Point . . . . .	78
7.17	Application of MMB, LMB, and RMB to Irregular Features of Size . . . . .	80
7.18	Datum Feature Selection Practical Application . . . . .	80
7.19	Simultaneous Requirements . . . . .	80
7.20	Restrained Condition . . . . .	81
7.21	Datum Reference Frame Identification . . . . .	82
7.22	Customized Datum Reference Frame Construction . . . . .	82
7.23	Application of a Customized Datum Reference Frame . . . . .	82
7.24	Datum Targets . . . . .	83
<b>Section 8</b>	<b>Tolerances of Form . . . . .</b>	<b>148</b>
8.1	General . . . . .	148
8.2	Form Control . . . . .	148
8.3	Specifying Form Tolerances . . . . .	148
8.4	Form Tolerances . . . . .	148
8.5	Average Diameter . . . . .	150
<b>Section 9</b>	<b>Tolerances of Orientation . . . . .</b>	<b>163</b>
9.1	General . . . . .	163

9.2	Orientation Control . . . . .	163
9.3	Specifying Orientation Tolerances . . . . .	163
9.4	Tangent Plane . . . . .	164
9.5	Alternative Practice . . . . .	164
<b>Section 10</b>	<b>Tolerances of Position . . . . .</b>	<b>179</b>
10.1	General . . . . .	179
10.2	Positional Tolerancing . . . . .	179
10.3	Positional Tolerancing Fundamentals — I . . . . .	179
10.4	Positional Tolerancing Fundamentals — II . . . . .	182
10.5	Pattern Location . . . . .	184
10.6	Coaxial Feature Controls . . . . .	187
10.7	Tolerancing for Symmetrical Relationships . . . . .	188
<b>Section 11</b>	<b>Tolerances of Profile . . . . .</b>	<b>240</b>
11.1	General . . . . .	240
11.2	Profile . . . . .	240
11.3	Tolerance Zone Boundaries . . . . .	240
11.4	Profile Applications . . . . .	241
11.5	Material Condition and Boundary Condition Modifiers as Related to Profile Controls . . . . .	242
11.6	Composite Profile . . . . .	242
11.7	Multiple Single-Segment Profile Tolerancing . . . . .	244
11.8	Combined Controls . . . . .	244
11.9	Profile of a Line as a Refinement . . . . .	244
11.10	Dynamic Profile Tolerance Modifier . . . . .	244
<b>Section 12</b>	<b>Tolerances of Runout . . . . .</b>	<b>287</b>
12.1	General . . . . .	287
12.2	Runout . . . . .	287
12.3	Runout Tolerance . . . . .	287
12.4	Types of Runout Tolerances . . . . .	287
12.5	Runout Tolerance and Size . . . . .	288
12.6	Application . . . . .	288
12.7	Specification . . . . .	289
<b>Mandatory Appendix</b>		
I	Alternate Practices . . . . .	306
<b>Nonmandatory Appendices</b>		
A	Principal Changes and Improvements . . . . .	310
B	Formulas for Positional Tolerancing . . . . .	315
C	Form, Proportion, and Comparison of Symbols . . . . .	318
D	Former Practices . . . . .	326
<b>Figures</b>		
3-1	Related and Unrelated AME . . . . .	10
3-2	Related and Unrelated Actual Minimum Material Envelope From Figure 3-1 . . . . .	11
4-1	Angular Units . . . . .	19

4-2	Millimeter Dimensions .....	19
4-3	Decimal Inch Dimensions .....	19
4-4	Application of Dimensions .....	19
4-5	Grouping of Dimensions .....	19
4-6	Spacing of Dimension Lines .....	20
4-7	Staggered Dimensions .....	20
4-8	Oblique Extension Lines .....	20
4-9	Breaks in Extension Lines .....	20
4-10	Point Locations .....	20
4-11	Limited Length or Area Indication .....	21
4-12	Leaders .....	21
4-13	Leader-Directed Dimensions .....	21
4-14	Minimizing Leaders .....	22
4-15	Leader Directions .....	22
4-16	Reading Directions .....	22
4-17	Intermediate Reference Dimension .....	22
4-18	Overall Reference Dimension .....	22
4-19	Diameters .....	23
4-20	Radii .....	23
4-21	Radius With Located Center .....	23
4-22	Radii With Unlocated Centers .....	23
4-23	Foreshortened Radii .....	24
4-24	True Radius .....	24
4-25	Spherical Radius .....	24
4-26	Dimensioning Arcs and Chords .....	24
4-27	Slotted Holes .....	25
4-28	Partially Rounded Ends .....	25
4-29	Rounded Corners .....	25
4-30	Circular Arc Outline .....	25
4-31	Coordinate or Offset Outline .....	25
4-32	Tabulated Outline .....	25
4-33	Symmetrical Outline .....	26
4-34	Round Holes .....	26
4-35	Counterbored Holes .....	26
4-36	Holes With Multiple Counterbores .....	27
4-37	Countersunk and Counterdrilled Holes .....	27
4-38	Countersink on a Curved Surface .....	28
4-39	Spotfaced Holes .....	28
4-40	Chamfers .....	28
4-41	45° Chamfer .....	28
4-42	Internal Chamfers .....	29
4-43	Chamfers Between Surfaces at Other Than 90° .....	29
4-44	Keyseats .....	29
4-45	Knurls .....	29
4-46	Knurls for Press Fits .....	29

4-47	Rectangular Coordinate Dimensioning . . . . .	30
4-48	Rectangular Coordinate Dimensioning Without Dimension Lines . . . . .	30
4-49	Rectangular Coordinate Dimensioning in Tabular Form . . . . .	31
4-50	Polar Coordinate Dimensioning . . . . .	31
4-51	Repetitive Features . . . . .	31
4-52	Repetitive Features and Dimensions . . . . .	32
5-1	Limit Dimensioning . . . . .	40
5-2	Plus and Minus Tolerancing . . . . .	40
5-3	Indicating Symbols for Metric Limits and Fits . . . . .	40
5-4	Tolerance Accumulation: One Datum Reference Frame . . . . .	41
5-5	Tolerance Accumulation: Multiple Datum Reference Frames . . . . .	42
5-6	Relating Dimensional Limits to an Origin . . . . .	42
5-7	Extreme Variations of Form Allowed by a Size Tolerance . . . . .	43
5-8	Extreme Variations of Form Allowed by a Geometric Tolerance — Perfect Form at LMC . . . . .	43
5-9	Size Meaning . . . . .	44
5-10	Independency and Flatness Application . . . . .	44
5-11	Continuous Feature, External Cylindrical . . . . .	45
5-12	Continuous Feature, Internal Cylindrical . . . . .	45
5-13	Continuous Feature, External Width . . . . .	46
5-14	Virtual and Resultant Condition Boundaries Using the MMC Concept — Internal Feature . . . . .	46
5-15	Virtual and Resultant Condition Boundaries Using the LMC Concept — Internal Feature . . . . .	47
5-16	Inner and Outer Boundaries Using the RFS Concept — Internal Feature . . . . .	48
5-17	Virtual and Resultant Condition Boundaries Using the MMC Concept — External Feature . . . . .	49
5-18	Virtual and Resultant Condition Boundaries Using the LMC Concept — External Feature . . . . .	50
5-19	Inner and Outer Condition Boundaries Using the RFS Concept — External Feature . . . . .	51
5-20	Tolerancing an Angular Surface Using a Combination of Linear and Angular Dimensions . . . . .	51
5-21	Specifying Tapers . . . . .	52
5-22	Specifying a Basic Taper and a Basic Diameter . . . . .	52
5-23	Specifying a Flat Taper . . . . .	52
5-24	Specifying a Radius . . . . .	52
5-25	Specifying a Controlled Radius . . . . .	53
5-26	Statistical Tolerancing . . . . .	53
5-27	Statistical Tolerancing With Arithmetic Limits . . . . .	53
5-28	Statistical Tolerancing With Geometric Controls . . . . .	53
6-1	Geometric Characteristic Symbols . . . . .	59
6-2	Datum Feature Symbol . . . . .	59
6-3	Datum Feature Symbols on a Feature Surface and an Extension Line . . . . .	59
6-4	Placement of Datum Feature Symbols on Features of Size . . . . .	60
6-5	Placement of Datum Feature Symbol in Conjunction With a Feature Control Frame . . . . .	60
6-6	Two Datum Features Establishing a Single Datum Plane . . . . .	61
6-7	Datum Target Symbol Examples . . . . .	61
6-8	Datum Target Point . . . . .	61
6-9	Datum Target Line . . . . .	62
6-10	Datum Target Area . . . . .	62
6-11	Basic Dimension Symbol Application . . . . .	63

6-12	Modifying Symbols .....	63
6-13	Indicating That the Specified Tolerance Is a Statistical Geometric Tolerance .....	63
6-14	Statistical Tolerance Symbol .....	63
6-15	"Between" Symbol .....	63
6-16	Counterbore and Spotface Symbols .....	64
6-17	Countersink Symbol .....	64
6-18	Depth Symbol .....	64
6-19	Square Symbol .....	65
6-20	Dimension Origin Symbol .....	65
6-21	Application of "All Over" and "All Around" Symbols .....	65
6-22	Feature Control Frame With "Free State" Symbol .....	65
6-23	Application of "Movable Datum Target" Symbol .....	65
6-24	Feature Control Frame .....	65
6-25	Feature Control Frame Incorporating a Datum Feature Reference .....	65
6-26	Order of Precedence of Datum Feature Reference .....	66
6-27	Multiple Feature Control Frames .....	66
6-28	Combined Feature Control Frame and Datum Feature Symbol .....	66
6-29	Feature Control Frame With a Projected Tolerance Zone Symbol .....	66
6-30	Feature Control Frame Placement .....	67
6-31	Tabulated Tolerances .....	69
7-1	Datum Reference Frame .....	85
7-2	Sequence of Datum Features Relates Part to Datum Reference Frame .....	86
7-3	Constrained Degrees of Freedom for Primary Datum Features .....	87
7-4	Part Where Rotational Constraint Is Important .....	88
7-5	Development of a Datum Reference Frame for the Part in Figure 7-4 .....	89
7-6	Development of a Datum Reference Frame .....	90
7-7	Datum Plane Establishment .....	92
7-8	Establishment of Datums for Primary External Cylindrical Datum Feature RMB .....	92
7-9	Establishment of Datums for Primary Internal Cylindrical Datum Feature RMB .....	93
7-10	Establishment of Datums for Primary External Datum Width Feature RMB .....	94
7-11	Establishment of Datums for Primary Internal Datum Width Feature RMB .....	95
7-12	Development of a Datum Reference Frame With Translation Modifier .....	96
7-13	Inclined Datum Feature .....	98
7-14	Part With Cylindrical Datum Feature .....	99
7-15	Multiple Datum Reference Frames and Their Interrelationships .....	100
7-16	Two Coaxial Datum Features, Single Datum Axis .....	101
7-17	Two Datum Features RMB, Single Datum Axis .....	102
7-18	Hole Pattern Identified as Datum Feature .....	103
7-19	Effect of Secondary Datum Feature Reference Applicable at RMB and MMB .....	104
7-20	Effect of Primary Datum Feature Reference Applicable at RMB and MMB .....	105
7-21	Secondary and Tertiary Datum Features RMB .....	106
7-22	Example Calculations of MMB .....	107
7-23	Example Calculations of LMB .....	108
7-24	Example Calculations of Maximum External Boundary for RMB Applications .....	109
7-25	Secondary and Tertiary Datum Features at LMB .....	110

7-26	Secondary and Tertiary Datum Features at MMB . . . . .	111
7-27	Planar Common Datum Features . . . . .	112
7-28	Partial Surface as a Datum Feature . . . . .	113
7-29	Contoured Surface as a Datum Feature . . . . .	114
7-30	Contoured Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB . . . . .	115
7-31	Contoured Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at MMB . . . . .	115
7-32	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB . . . . .	116
7-33	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at MMB . . . . .	116
7-34	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB . . . . .	117
7-35	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at BSC . . . . .	117
7-36	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at MMB . . . . .	118
7-37	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at LMB . . . . .	118
7-38	Size Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB . . . . .	119
7-39	Size Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB, Translate . . . . .	119
7-40	Irregular and Regular Features of Size as Datum Features . . . . .	120
7-41	Coaxial Irregular Datum Feature of Size . . . . .	122
7-42	Possible Datum Feature and True Geometric Counterparts From Three Pins Used as an Irregular Feature of Size . . . . .	124
7-43	Mating Parts for Functional Datum Section . . . . .	125
7-44	Functional Datum Application: Pulley . . . . .	126
7-45	Functional Datum Application: Adapter . . . . .	127
7-46	Simultaneous Position and Profile Tolerances . . . . .	128
7-47	Part With Nominally Aligned Features: Simultaneous Requirement . . . . .	129
7-48	Part With Nominally Aligned Features: Separate Requirements . . . . .	130
7-49	Restrained Condition Application . . . . .	131
7-50	Indication of Unrestrained Datum Targets for a Primary Multiple Datum Feature Reference . . . . .	132
7-51	Indication of Unrestrained Datum Targets for a Secondary Datum Feature Reference . . . . .	133
7-52	Planar Combined Datum Features . . . . .	134
7-53	Datum Targets Used to Establish Datum Reference Frame for Complex Part . . . . .	135
7-54	Datum Reference Frame Identification . . . . .	136
7-55	Conical Datum Feature Referenced to Constrain Five Degrees of Freedom . . . . .	137
7-56	Conical Datum Feature Reference Customized to Constrain Four Degrees of Freedom . . . . .	138
7-57	Customized Datum Reference Frame . . . . .	139
7-58	Application of Movable Datum Targets . . . . .	140
7-59	Datum Target Spheres . . . . .	142
7-60	Application of Datum Targets to Establish a Datum Reference Frame . . . . .	143
7-61	Primary Datum Axis Established by Datum Target Points on a Single Cylindrical Feature . . . . .	144