



Designation: G195 – 18

## Standard Guide for Conducting Wear Tests Using a Rotary Platform Abraser<sup>1</sup>

This standard is issued under the fixed designation G195; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reappraisal.

### 1. Scope\*

1.1 This guide covers and is intended to assist in establishing procedures for conducting wear tests of rigid or flexible materials utilizing the rotary platform abraser.

1.2 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.2.1 *Exception*—Inch-pound units are used when stating rotational speed and determining coating thickness.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

### 2. Referenced Documents

#### 2.1 ASTM Standards:<sup>2</sup>

- [B607 Specification for Autocatalytic Nickel Boron Coatings for Engineering Use](#)
- [B733 Specification for Autocatalytic \(Electroless\) Nickel-Phosphorus Coatings on Metal](#)
- [B893 Specification for Hard-Coat Anodizing of Magnesium for Engineering Applications](#)
- [C501 Test Method for Relative Resistance to Wear of Unglazed Ceramic Tile by the Taber Abraser](#)
- [C744 Specification for Prefaced Concrete and Calcium Silicate Masonry Units](#)
- [C957/C957M Specification for High-Solids Content, Cold](#)

<sup>1</sup> This guide is under the jurisdiction of ASTM Committee G02 on Wear and Erosion and is the direct responsibility of Subcommittee G02.30 on Abrasive Wear. Current edition approved Oct. 1, 2018. Published October 2018. Originally approved in 2008. Last previous edition approved in 2013 as G195 – 13a. DOI: 10.1520/G0195-18.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, [www.astm.org](http://www.astm.org), or contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org). For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

- [Liquid-Applied Elastomeric Waterproofing Membrane With Integral Wearing Surface](#)
- [C1353/C1353M Test Method for Abrasion Resistance of Dimension Stone Subjected to Foot Traffic Using a Rotary Platform Abraser](#)
- [C1803 Guide for Abrasion Resistance of Mortar Surfaces Using a Rotary Platform Abraser](#)
- [D154 Guide for Testing of Varnishes \(Withdrawn 2018\)<sup>3</sup>](#)
- [D1044 Test Method for Resistance of Transparent Plastics to Surface Abrasion](#)
- [D2205 Guide for Selection of Tests for Traffic Paints](#)
- [D3389 Test Method for Coated Fabrics Abrasion Resistance \(Rotary Platform Abrader\)](#)
- [D3451 Guide for Testing Coating Powders and Powder Coatings](#)
- [D3489 Test Methods for Microcellular Urethane Materials](#)
- [D3730 Guide for Testing High-Performance Interior Architectural Wall Coatings](#)
- [D3794 Guide for Testing Coil Coatings](#)
- [D3884 Guide for Abrasion Resistance of Textile Fabrics \(Rotary Platform, Double-Head Method\)](#)
- [D4060 Test Method for Abrasion Resistance of Organic Coatings by the Taber Abraser](#)
- [D4685/D4685M Test Method for Pile Fabric Abrasion](#)
- [D4712 Guide for Testing Industrial Water-Reducible Coatings \(Withdrawn 2014\)<sup>3</sup>](#)
- [D5034 Test Method for Breaking Strength and Elongation of Textile Fabrics \(Grab Test\)](#)
- [D5035 Test Method for Breaking Force and Elongation of Textile Fabrics \(Strip Method\)](#)
- [D5144 Guide for Use of Protective Coating Standards in Nuclear Power Plants](#)
- [D5146 Guide to Testing Solvent-Borne Architectural Coatings](#)
- [D5324 Guide for Testing Water-Borne Architectural Coatings](#)
- [D6037 Test Methods for Dry Abrasion Mar Resistance of High Gloss Coatings](#)
- [D7255 Test Method for Abrasion Resistance of Leather \(Rotary Platform, Abraser Method\)](#)

<sup>3</sup> The last approved version of this historical standard is referenced on [www.astm.org](http://www.astm.org).

\*A Summary of Changes section appears at the end of this standard

- [E1795 Specification for Non-Reinforced Liquid Coating Encapsulation Products for Leaded Paint in Buildings](#)
- [F362/F362M Test Method for Determining the Erasability of Inked Ribbons \(Withdrawn 2016\)<sup>3</sup>](#)
- [F510/F510M Test Method for Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method](#)
- [F1344 Specification for Rubber Floor Tile](#)
- [F1478 Test Method for Determination of Abrasion Resistance of Images Produced from Copiers and Printers \(Taber Method\)](#)
- [F1978 Test Method for Measuring Abrasion Resistance of Metallic Thermal Spray Coatings by Using the Taber Abraser](#)
- [F2051 Specification for Implantable Saline Filled Breast Prosthesis](#)
- [F2068 Specification for Femoral Prostheses—Metallic Implants](#)
- [G40 Terminology Relating to Wear and Erosion](#)

## 5. Significance and Use

5.1 This test guide provides a means to quantify the abrasion resistance of material surfaces, and may be related to end-use performance, or used to comparatively rank material performance, or both. The resistance of material surfaces to abrasion, as measured on a testing machine in the laboratory, is generally only one of several factors contributing to wear performance as experienced in the actual use of the material. Other factors may need to be considered in any calculation of predicted life from specific abrasion data.

5.2 The resistance of material surfaces to abrasion may be affected by factors including test conditions; type of abrasant; pressure between the specimen and abrasant; mounting or tension of the specimen; and type, kind, or amount of finishing materials.

5.3 Abrasion tests utilizing the rotary platform abraser may be subject to variation due to changes in the abrasant during the course of specific tests. Depending on abrasant type and test specimen, the abrading wheel surface may change (that is, become clogged) due to the pick-up of finishing or other materials from test specimens. To reduce this variation, the abrading wheels should be resurfaced at regularly defined intervals. See [Appendix X2](#).

5.4 The measurement of the relative amount of abrasion may be affected by the method of evaluation and influenced by the judgment of the operator.

## 6. Apparatus

6.1 *Rotary Platform Abraser*, consisting of the elements described in [6.1.1](#) to [6.1.5](#) (see [Fig. 1](#)). Also referred to as a rotary platform, double head (RPDH) abraser or abrader.

6.1.1 A turntable specimen platform, which is removable, that includes a rubber pad, clamp plate, centrally located threaded post and nut. When testing flexible specimens, the turntable platform will also include a clamping ring. The turntable shall be motor driven, and mounted so as to produce a circular surface travel of a flat specimen in the plane of its surface. The turntable platform should rotate with no visible wobble. This can be checked with a dial indicator at a distance of 1.6 mm from the top outer edge of the platform to make sure it runs true within 0.2 mm.

6.1.2 A motor capable of rotating the turntable platform counter-clockwise at a speed of either  $72 \text{ r/min} \pm 2 \text{ r/min}$  or  $60 \text{ r/min} \pm 2 \text{ r/min}$ .

6.1.3 A pair of pivoted arms to which the abrasive wheels and accessory weights or counterweights are attached.

6.1.4 A vacuum suction system and vacuum pickup nozzle to remove debris and abrasive particles from the specimen surface during testing. The vacuum suction force shall be 13.7 kPa or greater, as measured by a vacuum gauge at the vacuum pick-up nozzle port. The height of the vacuum pickup nozzle shall be adjustable, and the nozzle will have two 8 mm openings except in the case of [D1044](#) when 11 mm openings are specified. One opening shall be positioned between the two wheels and over the wear path and the other placed diametrically opposite, with the distance between the axes of the two openings  $76.0 \text{ mm} \pm 1.0 \text{ mm}$ .

## 3. Terminology

3.1 *Definitions of Terms Specific to This Standard:*

3.1.1 *abraser*—wear testing instrument to evaluate abrasion resistance, also referred to as an abrader.

3.1.2 *abrasion cycle*—in abrasion testing, one or more movements of the abrasant across a material surface, or the material surface across the abrasant, that permits a return to its starting position. In the case of the rotary platform abraser test method, it consists of one complete rotation of the turntable specimen platform.

3.1.3 *mil*—a U.S. term referring to the imperial unit of measure of one one-thousandth of an inch (0.001 in.) referred to elsewhere in the world as “one thou;”  $1 \text{ mil} = 25.4 \mu\text{m}$ .

3.1.4 *resurface*—procedure of cleaning and refreshing the running surface of an abrasive wheel prior to use or during testing.


3.2 For definitions of other wear terms used in this guide, refer to Terminology [G40](#).

3.3 *Acronyms:*

3.3.1 *CAMI*—Coated Abrasives Manufacturers Institute

## 4. Summary of Practice

4.1 A specimen is abraded using rotary rubbing action under controlled conditions of pressure and abrasive action. The test specimen, mounted on a turntable platform, turns on a vertical axis, against the sliding rotation of two abrading wheels. The wheels shall be mounted in such a way that when they are in contact with the rotating test specimen, they rotate in opposing directions. One abrading wheel rubs the specimen outward toward the periphery and the other, inward toward the center while a vacuum system removes wear debris generated during the test. The resulting abrasion marks form a pattern of crossed arcs over an area of approximately  $30 \text{ cm}^2$ . Resistance to abrasion is evaluated by various means which are described in Section [12](#).

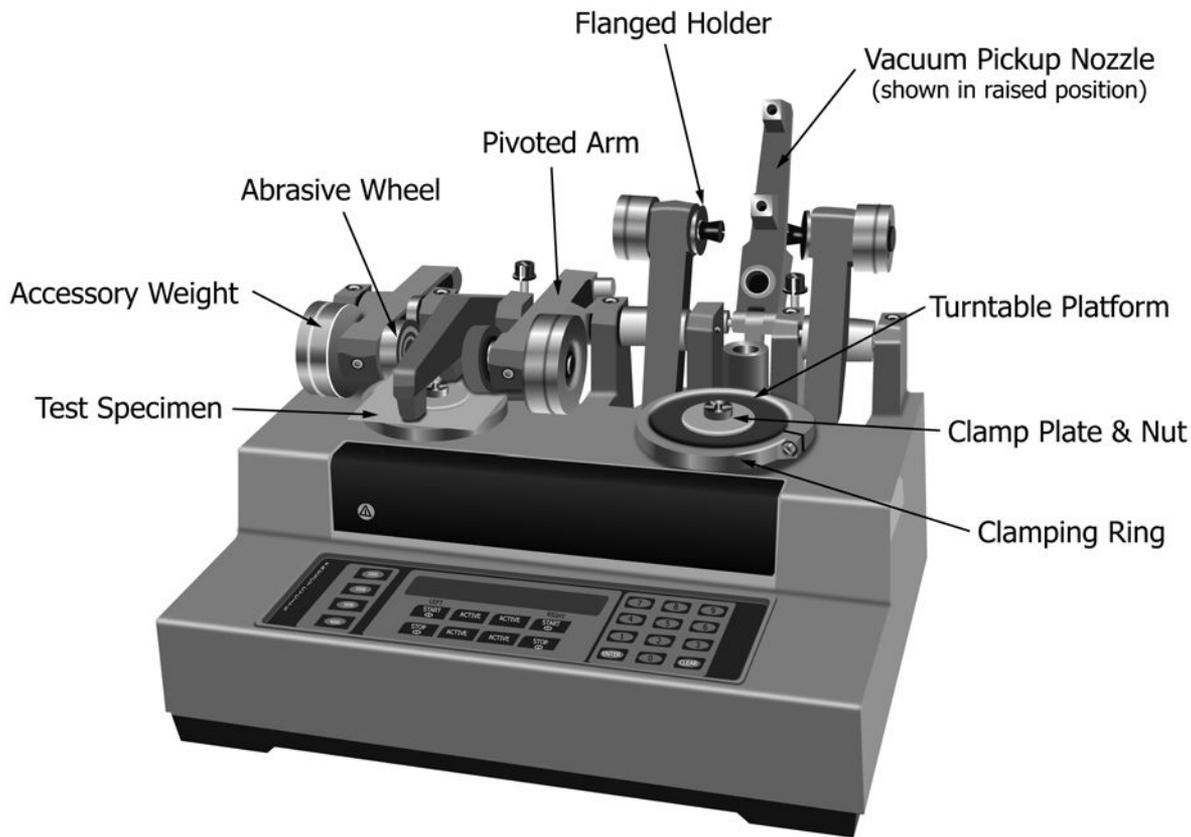

Note: Vacuum Suction System not shown

**FIG. 1 Rotary Platform Abraser**

6.1.5 A counter to record the number of abrasion cycles (revolutions) made by the turntable platform.

6.2 *Abrasive Wheels*,<sup>4</sup> which are attached to the free end of the pivoted arms and are able to rotate freely about horizontal spindles.

6.2.1 The wheels shall be cylindrically shaped; 12.7 mm ± 0.3 mm thick; include an axial hole 16.0 mm ± 0.1 mm to allow the wheel to be mounted to the flanged holder on the pivoted arm; and have an external diameter of 51.9 mm ± 0.5 mm when new, and in no case less than 44.4 mm. The abrasive wheels are either resilient or vitrified based, with both types of wheels consisting of hard particles embedded in a binder material and manufactured in different grades of abrasive quality. Other types of wheels, which do not include hard particles embedded in a binder material, may also be used (see X1.4).

6.2.2 The internal faces of the abrasive wheels shall be 52.4 mm ± 1.0 mm apart and the hypothetical line through the two spindles shall be 19.05 mm ± 0.3 mm away from the central axis of the turntable (see Fig. 2). The wheels shall be spaced equally on both sides from the wheel-mounting flange to the center of the specimen holder. The distance from the

<sup>4</sup> The sole source of supply of the apparatus known to the committee at this time is Taber Industries, 455 Bryant Street, North Tonawanda, NY 14120. If you are aware of alternative suppliers, please provide this information to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee,<sup>1</sup> which you may attend.

inside of the wheel mounting flange to the center of the specimen holder shall be 38.9 mm ± 0.5 mm.

6.2.3 When resting on the specimen, the wheels will have a peripheral engagement with the surface of the specimen, the direction of travel of the periphery of the wheels and of the specimen at the contacting portions being at acute angles, and the angles of travel of one wheel periphery being opposite to that of the other. Motion of the abrasive wheels, in opposite directions, is provided by rotation of the specimen and the associated friction therefrom.

6.2.4 Wheels with an expiration date shall not be used after the date stamped on them.

6.3 *Accessory Weights*, can be attached to the pivoted arms to increase or decrease the force at which the wheel is pressed against the specimen, exclusive of the mass of the wheel itself. Commonly used masses are 250 g ± 1 g, 500 g ± 1 g, and 1000 g ± 1 g. Accessory weight references are per arm (not combined), and include the mass of the pivoted arm.

#### 6.4 *Auxiliary Apparatus:*

6.4.1 Refacing disc, for resurfacing of resilient wheels. The refacing disc shall be silicon carbide coated abrasive with an average particle size of 92 μm (150 grit CAMI grade), approximately 102 mm diameter with a 7 mm center hole, such as type S-11 or equivalent.

6.4.2 Refacing stone (for example, fine side of ST-11<sup>4</sup>), for resurfacing of CS-10F<sup>4</sup> resilient wheels when testing transparent materials.

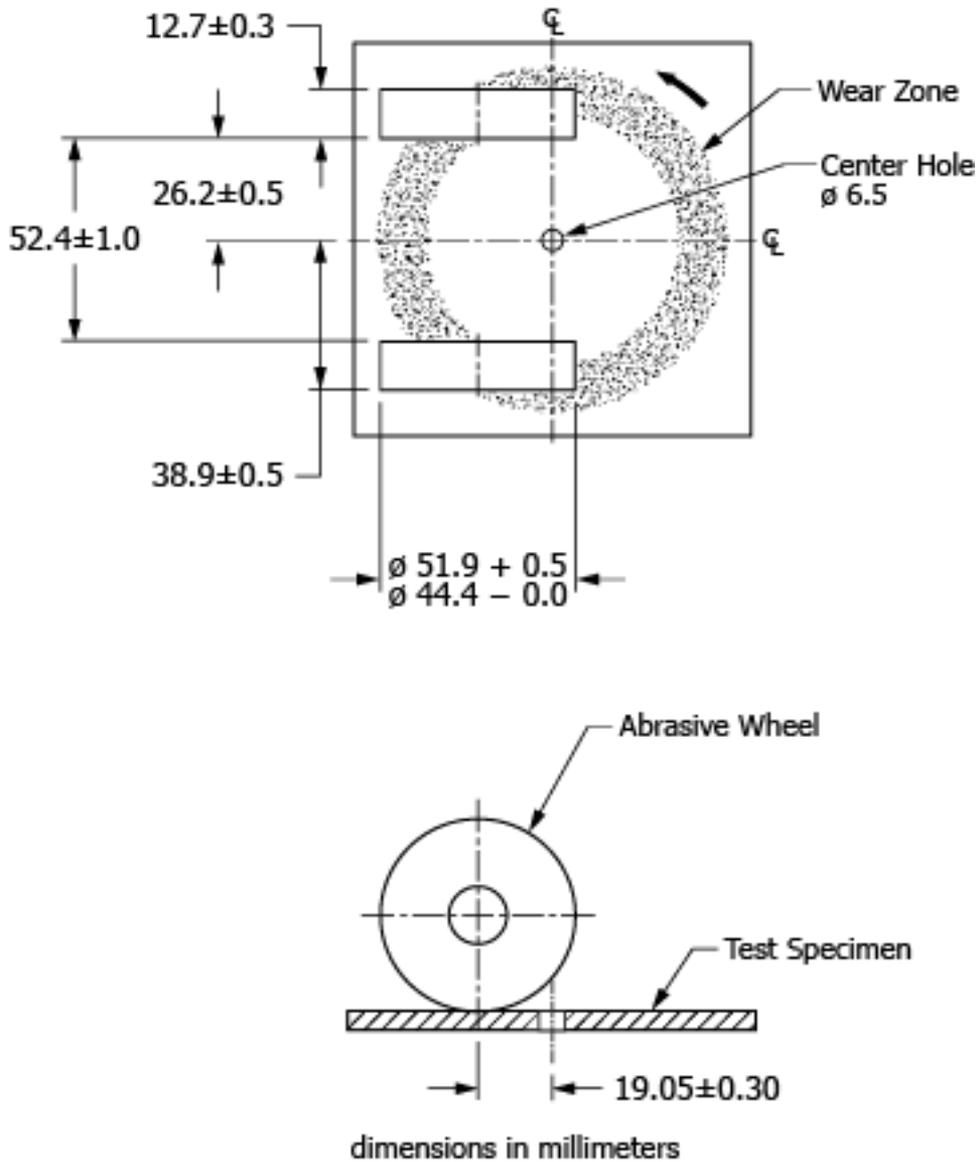


FIG. 2 Arrangement of Rotary Platform Abraser Test Set-Up

6.4.3 Wheel refacer, with a diamond tool for resurfacing vitrified wheels or correcting out of round wheels.

6.4.4 A soft bristle brush, to remove loose particles from the surface of the specimen after testing.

6.4.5 Specimen mounting cards, approximately 108 mm round or square with a 7 mm center hole and one side coated with pressure sensitive adhesive to secure specimens.

## 7. Specimen Preparation

7.1 *Materials*—It is the intent of this test guide to allow for the abrasion testing of any material form, provided it is essentially flat. The field of application is varied and includes solid materials, metals, plastics, coated surfaces (for example, paint, lacquer, electroplated), textiles (ranging from sheer silks to heavy upholstery), leather, rubber, linoleum, and the rest.

7.1.1 Accepted industry practice should be employed for specimen preparation. Specific recommendations for specimen preparation may be available from the ASTM subcommittee

responsible for that material. Selection and use should be agreed upon between the interested parties.

7.2 *Specimen Thickness*—The standard material thickness that can be evaluated with the rotary platform abramer is 6.5 mm or less.

NOTE 1—For materials thicker than 6.5 mm but less than 12.7 mm, an extension nut such as type S-21<sup>4</sup> or equivalent may be used. Alternatively, an arm height extension kit<sup>4</sup> will permit testing of specimens up to 40 mm.

7.3 *Specimen Size*—The width of the resulting wear path is 12.7 mm, and is located 31.75 mm from the center of the specimen. The size of the specimen may vary depending on the material being evaluated:

7.3.1 For most rigid materials, a sample approximately 100 mm square is recommended with a 6.5 mm diameter center hole.

7.3.2 Flexible specimens are typically circular and require the use of the clamp ring. If a mounting card is used, the specimen should be approximately 105 mm in diameter with a