

ANSI/AWWA **D115-20**
(Revision of *ANSI/AWWA D115-17*)

AWWA Standard

Tendon-Prestressed Concrete Water Tanks

Effective date: July 1, 2020.

First edition approved by Board of Directors June 22, 1995.

This edition approved Jan. 23, 2020.

Approved by American National Standards Institute Jan. 27, 2020.



American Water Works
Association



This is a preview. [Click here to purchase the full publication.](#)


AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing info@ansi.org.

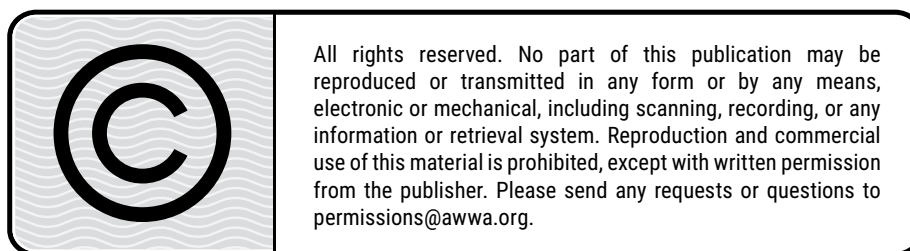

ISBN-13, print: 978-1-64717-016-5

ISBN-13, electronic: 978-1-61300-556-9

DOI: <http://dx.doi.org/10.12999/AWWA.D115.20>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2020 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Committee on Concrete Water Tanks, Tendon-Type Prestressed, which reviewed and approved this standard, had the following personnel at the time of approval:

Daniel O. Carroll, *Chair*

Christian Badger, *Vice Chair*

Anthony J. Galterio, *Secretary*

General Interest Members

J.R. Ballard, Wessler Engineering Inc., Indianapolis, Ind.

R.T. Bates, Bates Engineering Inc., Lakewood, Colo.

S.R. Close, Close Associates LLC, Lakewood, Colo.

M. Garcia, AECOM, Denver, Colo.

S. Hansen, Sunrise Engineering, Midvale, Utah

T.P. Kenyon, Merrick and Company Inc., Denver, Colo.

R. Kianoush, Ryerson University, Toronto, Ont.

F.S. Kurtz (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.

W.H. Peffley, Crawford, Murphy & Tilly, Springfield, Ill.

N. Robertson, OBEC Consulting Engineers, Eugene, Ore.

T.R. Volz (*alternate*), AECOM, Denver, Colo.

Producer Members

J.C. Allen, Dutchland Inc., Gap, Pa.

J. Anderson, VSL/Structural Technologies, Wheat Ridge, Colo.

C. Badger, Lillard & Clark Construction Company Inc., Denver, Colo.

D.J. Beiler (*alternate*), Dutchland Inc., Gap, Pa.

A.J. Galterio (*alternate*), VSL/Structural Technologies, Wheat Ridge, Colo.

A.I. Johnson, Post-Tensioning Institute, Farmington Hills, Mich.

B.A. Zavitz, Tindall Corporation, Conley, Ga.

User Members

D.O. Carroll, Winter Park Ranch Water and Sanitation District, Fraser, Colo.

W.C. Duke (*liaison, nonvoting*), Standards Council Liaison, Bureau of Reclamation, Denver, Colo.

J.J. Duncan, Champlain Water District, South Burlington, Vt.

G.T. Hardiman, Fruitland Mutual Water Company, Puyallup, Wash.

K.L. Hill, Las Vegas, Nev.

W.J. Horst, Montgomery County Environmental Services, Moraine, Ohio

Z.P. Margolis, Town of Silverthorne, Silverthorne, Colo.

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		2.8	Epoxy Bonding Agent 11
I	Introduction..... vii	2.9	Shrinkage-Compensating Grout 11
I.A	Background..... vii	2.10	Concrete Coatings..... 11
I.B	History..... vii	2.11	Sealants 12
I.C	Acceptance viii	3 Design	
II	Special Issues. ix	3.1	Notation..... 12
II.A	General ix	3.2	Design Method 13
II.B	Site-Specific Conditions x	3.3	Design Loads..... 14
II.C	Tendons x	3.4	Allowable Stresses 16
III	Use of This Standard x	3.5	Footing Design..... 18
III.A	Purchaser Options and Alternatives ... x	3.6	Floor Design 18
IV	Modification of Standard xiii	3.7	Wall Design..... 20
V	Major Revisions..... xiii	3.8	Concrete Roofs..... 26
VI	Comments xiii	3.9	Dome Roof Design 27
Standard		3.10	Other Roof Designs..... 30
1 General		3.11	Concrete and Shotcrete Cover 31
1.1	Scope..... 1	3.12	Additional Considerations in Cold Climates..... 32
1.2	Definitions 1	3.13	Tank Appurtenances..... 32
1.3	References 4	4 Earthquake Design Considerations	
2 Materials		4.1	Introduction..... 36
2.1	Concrete and Shotcrete 7	4.2	Seismic-Design Categories..... 37
2.2	Mixing Water 8	4.3	Seismic-Design Loads..... 38
2.3	Admixtures..... 8	4.4	Vertical and Horizontal Forces..... 40
2.4	Reinforcement..... 9	4.5	Other Effects..... 41
2.5	Ducts 9	4.6	Allowable Stresses 42
2.6	Sheathing 10	4.7	Maximum Allowable Coefficient of Friction 42
2.7	Elastomeric Materials 10		

SEC.	PAGE	SEC.	PAGE
4.8	Serviceability Requirements.....	43	
4.9	Foundation Design.....	43	
4.10	Minimum Freeboard	44	
4.11	Design for Seismic Effects of Backfill.....	44	
5	Construction Procedures		
5.1	Scope.....	44	
5.2	Cast-in-Place Concrete	45	
5.3	Precast Concrete.....	53	
5.4	Waterstops and Sealants.....	55	
5.5	Elastomeric Bearing Pads and Sponge Fillers	56	
5.6	Tolerances	56	
5.7	Cleaning and Disinfection.....	57	
5.8	Backfill	58	
5.9	Electrical Grounding	58	
6	Watertightness		
6.1	General	58	
6.2	Testing	59	
6.3	Repairs	60	
7	Observations	61	
8	Affidavit of Compliance	61	
Figures			
1	Typical Floor-Slab Construction Joints.....	19	
2	Types of Joints Used Between the Wall and Foundation of Concrete Water-Storage Tanks...	24	
3	(A) Hinged Dome–Wall Connection; (B) Separated Dome–Wall Connection	27	
4	Transfer of Tangential or Longitudinal Shear from Wall to Base	39	
5	Net Effective Base-Pad Width after Shear Deformation	42	
Table			
1	Response Modification Factor, R, for Type of Tank Base	37	
Appendixes			
A	Bibliography.....	63	
B	Observation Procedures.....	65	
B.1	Scope.....	65	
B.2	Observations During Construction ...	65	
B.3	Observations after Construction.....	69	
B.4	Observations During Routine Maintenance	70	
C	Additional Design Considerations...	73	
C.1	Roof Openings.....	73	
C.2	Ladders and Stairs	73	
C.3	Floors	73	
C.4	Sponge-Rubber Fillers	74	

Foreword

This foreword is for information only and is not part of ANSI/AWWA D115.*

I. Introduction.

I.A. *Background.* The New England Water Works Association (NEWWA) established a committee in 1958 to prepare a standard for the design and construction of circular prestressed-concrete water storage tanks. The committee submitted a suggested specification covering wire-wound prestressed-concrete tanks to NEWWA in October 1962 as a guide to those water utilities that wished to consider the use of these tanks.

The American Concrete Institute (ACI[†]) Committee 344 concluded eight years of committee work with a report titled “Design and Construction of Circular Prestressed Concrete Structures,” published in the *ACI Journal* in September 1970. This report referred to both wire-wound and tendon tanks. After publication of its first report in 1970, ACI Committee 344 could not reach a consensus on a combined report covering both wire-wound and tendon tanks. In 1985, the ACI Committee was divided into two subcommittees, and “interim” reports were completed in 1988 for both types of tanks. ACI did not publish these interim reports but made copies available until a consensus could be reached on a recombined report. However, a consensus could not be reached, and in the spring of 1994, ACI Committee 344 was divided into two separate committees: ACI 372 and ACI 373. ACI Committee 373 was disbanded in 2012.

I.B. *History.* In the December 1972 issue of *Journal AWWA*, circular prestressed-concrete water containment structures were discussed in four articles. As a result of these articles and continued discussion on the subject, a standards committee was authorized by the AWWA Standards Council on June 20, 1974, to develop an AWWA standard on circular prestressed-concrete water tanks. The AWWA Standards Committee on Circular Prestressed-Concrete Water Tanks held its first meeting on June 19, 1974.

After many meetings and the presentation of many differing viewpoints, this committee decided to defer work on a standard for tendon tanks and to concentrate only on a standard for wire-wound tanks. [ANSI/AWWA D110-86](#), Standard for Wire-Wound Prestressed Concrete Tanks, was published in 1986.

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† American Concrete Institute, 38800 Country Club Drive, Farmington Hills, MI 48331.

In 1988, the AWWA Standards Council authorized the formation of a new standards committee to develop a standard for tendon-type prestressed-concrete tanks, with the assigned task of developing a standard for the safe, efficient use of tendon-stressing techniques for design and construction of tanks. Subsequently, this new AWWA standards committee was formed and held its first meeting on June 21, 1989, under its first chair, Ib Falk Jorgensen.

The first edition of this standard was published in 1996 and incorporated applicable work of ACI and the AWWA standards committee that had developed [ANSI/AWWA D110-86](#). It contained requirements and recommendations, specifically for circular tendon-prestressed potable water tanks.

The second edition was expanded to include tendon-prestressed tanks of rectangular and other shapes, as well as circular. It was approved by the AWWA Board of Directors on Feb. 12, 2006.

The third edition of ANSI/AWWA D115 was approved on Jan. 14, 2017, and this fourth edition was approved on Jan. 23, 2020.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF[†]: NSF/ANSI/CAN[‡] 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects.

* Persons outside the United States should contact the appropriate authority having jurisdiction.

[†] NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

[‡] Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,* and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI/CAN 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA D115 does not address all material requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine materials requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

II.A. *General.* This standard reflects a committee consensus of industry practice concerning the design, detailing, and construction of prestressed-concrete water tanks that employ horizontal prestressing tendons in walls. This standard also addresses the use of prestressing tendons in floors, vertically in the walls, and in roofs. Recommended criteria and guidelines are presented to assist engineers in design and construction of both cast-in-place and precast concrete tanks using tendon prestressing, based on the specific detailed experience of the committee members. Engineering principles are tied to existing codes where applicable. Design and construction of prestressed-concrete water tanks are complex, requiring a wide range of special knowledge and experience. This standard represents a sharing of information on the unique aspects of analysis and construction that are encountered in these types of structures.

* Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

II.B. *Site-Specific Conditions.* Because of the wide range of site-specific environments, foundation conditions, loadings, and construction conditions throughout North America, this standard should not be expected to apply universally or to produce a cost-effective and maintenance-free structure in every situation. In adapting this standard to obtain the structure's expected service life for the actual conditions that are anticipated, the purchaser and the designer of the tank are advised to carefully study factors affecting the structure.

II.C. *Tendons.* There are three types of tendons used in the floors, walls, and roofs of tendon-prestressed concrete tanks: bonded, unbonded, and precast-pretensioned. Triple corrosion protection is provided for both bonded and unbonded tendons: (1) two-way prestressed-concrete cover, (2) waterproof plastic ducts or sheathing, and (3) rich cement grout or post-tensioning coating material with corrosion-inhibiting additives. The purchaser should rely on their purchaser's engineer to determine the appropriate type of tendon, taking into account the design requirements and local conditions.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* It is not the purpose of this standard either to define or recommend contractual relationships or to stipulate contractual obligations, which are the responsibility of the purchaser. Generally, purchasers may solicit competitive bids for tendon-prestressed concrete tanks by one of two alternative methods.

Under the first method, a qualified engineer is retained by the purchaser to design the structure and prepare construction drawings, specifications, and other contract documents. Competitive bids are then solicited from constructors and suppliers for construction of the tank. In this standard, these are referred to as *purchaser-furnished designs*.

Under the second method, the purchaser prepares performance specifications that require bidding constructors to prepare detailed project designs and specifications and construct the tank according to the approved design. In this standard, these are referred to as *design-construct projects*.

Although the division of information that must be covered in the purchaser's specifications for execution of each project type differs substantially, depending on who is responsible for the tank design, the information that must be supplied by the purchaser to successfully apply this standard is essentially the same for both methods.

ANSI/AWWA D115 does not address matters related to site selection and property acquisition. It has been assumed that the purchaser will have conducted sufficient background work in the form of studies, predesign surveys, subsurface investigations, and preliminary design work to establish the desired tank site, volume, operating water depth, and elevations. It is also assumed that the purchaser will have acquired the property, easements, and rights-of-way necessary for construction of the tank structure and associated pipelines connecting it to the system. Finally, it has been assumed that the purchaser will accomplish and/or provide the following as necessary or appropriate:

1. Whether compliance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects, is required for individual components and materials.
2. The site on which the tank is to be built, with adequate space to permit the constructor to erect the structure using customary methods.
3. A predesign site survey and preparation of a site plan showing existing topography, property lines, approximate tank location, setback, encumbrances, details of special construction features, and extent of final site grading.
4. A site geotechnical survey and foundation report, including logs of borings and test pits, and other pertinent soil and geological information, construction criteria for any backfill that may be necessary at a particular site, and foundation design criteria prepared by a registered professional engineer specializing in soil mechanics, including allowable bearing loads, anticipated total and differential settlements, and the seismic soil profile type.
5. Structure loading conditions, including but not limited to snow, wind, seismic, hydrostatic uplift, and other live loads, depending on the tank's intended use; the amount of earth cover over the tank, if any; the height of backfill against the tank wall, if any; and any other special loading conditions that are anticipated or special criteria on which the tank design is to be based. If, for example, the tank is located in a high-intensity earthquake area and must have an extra safety factor to continue to serve without damage, the purchaser may specify a greater importance factor for earthquake design than described in ACI 350.3 or provide design values for the horizontal acceleration and for the spectrum velocity.
6. A groundwater drainage and collection system plan.
7. Delivery of electric power and water service to the site.
8. Details of federal, state, and local requirements (Sec. 2).

III.A.1. Information Required for Use of This Standard. The items that follow are either required information or alternative options in the standard that