


ANSI/HI 9.6.6-2009

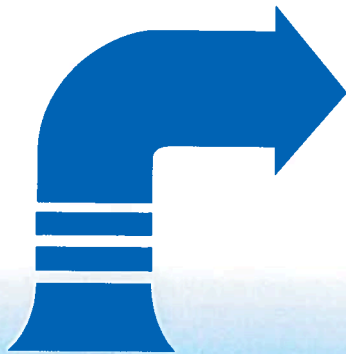

American National Standard for

Rotodynamic Pumps

for Pump Piping



6 Campus Drive
First Floor North
Parsippany, New Jersey
07054-4406
www.Pumps.org

ANSI/HI 9.6.6-2009

This is a preview. [Click here to purchase the full publication.](#)

This page intentionally blank.

American National Standard for
Rotodynamic Pumps
for Pump Piping

Sponsor
Hydraulic Institute
www.Pumps.org

Approved July 28, 2009
American National Standards Institute, Inc.

American National Standard

Approval of an American National Standard requires verification by ANSI that the requirements for due process, consensus and other criteria for approval have been met by the standards developer.

Consensus is established when, in the judgement of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the standards or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

Published By

Hydraulic Institute
6 Campus Drive, First Floor North
Parsippany, NJ 07054-4406

www.Pumps.org

Copyright © 2009 Hydraulic Institute
All rights reserved.

No part of this publication may be reproduced in any form,
in an electronic retrieval system or otherwise, without prior
written permission of the publisher.

Printed in the United States of America

ISBN 978-1-880952-60-3



Recycled
paper

Hydraulic Institute Standards, Copyright © 1997-2009, All Rights Reserved

[This is a preview. Click here to purchase the full publication.](#)

Contents

	Page
Foreword	v
9.6.6 Pump piping for rotodynamic pumps	1
9.6.6.1 Objective	1
9.6.6.2 Introduction	1
9.6.6.3 Inlet (suction) piping requirements	1
9.6.6.3.1 Inlet (suction) pipe size/velocity requirements	2
9.6.6.3.2 Effect of piping-generated swirl	2
9.6.6.3.3 Required straight pipe lengths	4
9.6.6.4 Inlet and outlet general piping requirements	4
9.6.6.4.1 Pipe nozzle alignment/pipe expansion load	4
9.6.6.4.2 Pipe supports/anchors	6
9.6.6.4.3 Parallel operation	7
9.6.6.5 Outlet (discharge) piping requirements	9
9.6.6.5.1 Pipe size/velocity requirements	9
9.6.6.5.2 Required straight pipe lengths	9
9.6.6.5.3 Recommended valves	9
9.6.6.5.4 Water hammer	10
9.6.6.6 References	10
9.6.6.7 Sources of additional information	11
9.6.6.8 List of acronyms	11
Appendix A System Curves	13
A.1 Calculation of the system curve	13
A.2 Pipe head loss calculation methods	15
Appendix B Water Hammer	17
B.1 Water hammer	17
Appendix C Selecting and Locating Pipe Supports and Restraints	21
C.1 Restraint and stops	21
C.2 Pipe supports for vertical loads	21
C.3 Guides and restraints	23
C.4 True anchors	23
C.5 Spring supports	23
C.6 Friction from supports	24
Appendix D Expansion Joints and Couplings	25
D.1 Expansion joint types	25
D.2 Expansion joint application	27
Appendix E Specialty Piping Components and Applications	29
E.1 Check valves and strainers	29
E.2 Devices to improve flow to the pump	30
E.3 Piping for suction lift applications	31
E.4 Solids/slurry	31

E.5	Air release valves	32
Appendix F	Discharge Pressure Pulsation and Acoustic Resonance	33
F.1	Discharge pressure pulsation/acoustic resonance	33
Appendix G	Index.	35
Figures		
9.6.6.3	— Suction pipe design	2
9.6.6.3.3a	— Pump installed with elbows	4
9.6.6.3.3b	— Undesirable effects of elbow directly on suction	5
9.6.6.4.3a	— Parallel pump installation	8
9.6.6.4.3b	— Constant-velocity manifold design, parallel pumps	8
9.6.6.4.3c	— Minimum required suction line lengths and spacing for parallel pumps	9
9.6.6.5.3	— Triple-duty valve	10
C.1	— Pipe supports for vertical loads.	22
C.2	— Solid pipe hanger supports	22
C.3	— Constant-effort spring supports	22
C.4	— Pipe guides	23
C.5	— Spring supports.	24
D.1	— Slip/packing expansion joint	25
D.2	— Rubber expansion joints	26
D.3	— Metal bellows expansion joint	26
D.4	— Expansion joint bolting arrangement	27
E.1	— Foot valve	29
E.2	— Typical temporary strainer	30
E.3	— Second upstream perpendicular elbow.	30
E.4	— Self-priming bypass	31
Tables		
9.6.6.3.2	— Minimum required straight pipe length (L2) before pump suction inlet.	3
B.1	— Magnitude of pressure wave.	20