



<b>SURFACE VEHICLE RECOMMENDED PRACTICE</b>	<b>J1986™</b>	<b>MAR2016</b>
	Issued 1993-02 Revised 2016-03	
	Superseding J1986 APR2001	
Balance Weight and Rim Flange Design Specifications, Test Procedures, and Performance Recommendations		

## RATIONALE

This document is being revised to add a shear force value when testing the Adhesive Weight removal, Paragraph 8.7.8.

Test procedures 8.3, 8.7.6, 10.01 were updated.

### 1. SCOPE

This SAE Recommended Practice is intended to serve as a guide for standardization of features, dimensions, and configurations of balance weights for aluminum and steel wheels intended for use on passenger cars, light trucks, and multipurpose vehicles to assure good installation and retention of the balance weight. This document also provides test procedures and minimum performance requirements for testing balance weight retention.

### 2. REFERENCES

#### 2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

##### 2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or +1 724-776-4970 (outside USA), [www.sae.org](http://www.sae.org).

SAE J393 Nomenclature - Wheels, Hubs, and Rims for Commercial Vehicles

##### 2.1.2 Tire & Rim Association Publication

Available from The Tire & Rim Association, Inc., 175 Montrose West Avenue, Suite 150, Copley, OH 44321, Tel: 330-666-8121, [www.us-tra.org](http://www.us-tra.org).

Tire & Rim Association Yearbook

Reference document for Adhesive Wet-Out can be purchased from ISH Standards Store at [www.ih.com](http://www.ih.com).

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2016 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)  
Tel: +1 724 776 4970 (outside USA)

**SAE values your input. To provide feedback on this Technical Report, please visit [standards/J1986\\_201603](http://standards/J1986_201603)**

This is a preview. Click here to purchase the full publication.

SAE WEB ADDRESS:

### 3. DEFINITIONS

#### 3.1 BALANCE WEIGHT ASSEMBLY

An assembly of the weight and the clip which is intended for mounting on the rim flange to balance the tire/wheel assembly about its axis of rotation and thus minimize vibrations due to the rotation of the tire/wheel assembly.

##### 3.1.1 Adhesive Weight

These weights are used to correct imbalance as in 3.1 and are placed on the inner rim diameter behind the spokes and on the inner diameter at a specified location on the inboard surface.

##### 3.1.2 Weight

A specified mass with contours to conform to the surface of the rim flange for clip on weights. Adhesive weights are a dense mass that can be formed to fit the inner rim diameter.

##### 3.1.3 Clip

Specially formed metal affixed to the weight to mount the balance weight on the rim flange.

##### 3.1.4 Spur

An optional part of a clip protruding from its surface interfacing with the rim flange that can enhance retention.

##### 3.1.5 Balance Weight Coating

Noncorrosive material coating to prevent corrosion.

##### 3.1.6 Balance Weight Key Dimensions

Dimensions which are essential for fitting the clip on balance weight on the rim flange.

##### 3.1.7 Balance Weight Size

The balance weight size is determined by the magnitude of the balance weight mass and is expressed in gm (oz).

##### 3.1.8 Balance Weight Retention Force

A static force required to remove the balance weight from the rim flange as set forth in Section 8. A shear force is required to test retention of the adhesive weight at its designated location on the inner rim diameter. To achieve proper retention for the adhesive weight a "wet-out" of 85% is required as define in document GM Standard GMW15851.

##### 3.1.9 Balance Weight Retention

The ability of the balance weight to maintain its secure position on the rim flange and at an adhesive weight location during various service conditions on the road as well as in the laboratory.

##### 3.1.10 Interference

The measure of clip on balance weight press fit computed as the difference between the flange thickness and the weight gap. This does not apply to Adhesive Weights.

3.1.11 For further definitions and descriptions of nomenclature of clip on balance weights, see Figure 1.

### 3.1.12 Rim Flange

That part of the rim where the clip on balance weight is mounted.

#### 3.1.12.1 Rim Flange Key Dimensions

Dimensions which are essential for fitting the clip on balance weight on the rim flange.

3.1.12.2 For further definitions and descriptions of nomenclature of rim flange features, see Figure 2 and Figure 3.


## 4. BALANCE WEIGHT ASSEMBLY TYPES

Clip on balance weight types are identified and marked by letter codes (Table 1). Four different types of clip on balance weights have been evaluated and recommended for use in the Industry: P, C, T, and MC (see Figure 4). Adhesive Weights are not considered to be part of "Assembly Types".

**Table 1 - Typical application chart clip on balance weight selection**

Wheel Rim Type	Weight Type	Weight Gap	Spur Depth	Flange Lip Thickness	Flange Offset
Reference Figure Number 7	C	1.6-2.0	NA	2.0-2.7	10 ± 1.2
Steel Rolled Flange & Light Alloy Rolled Flange	P	2.0-2.4	NA	2.7-3.3	10 ± 1.2
	T	2.7-3.1	NA	3.4-4.6	10 ± 1.2
	MC	4.1-4.5	0.7-1.1	5.0-6.0	10 ± 1.2
Reference Figure Number 6 Full Face Light Alloy, Steel, Clad	T	2.7-3.1	NA	3.4-4.6	10 ± 1.2
Reference Figure Number 5 Light Alloy Machined	MC	4.1-4.5	0.7-1.1	5.0-6.0	7.6 ± .5

NOTE: Wheels with Flange Lip thickness or tolerances outside of the typical ranges may require different Flange Offsets to meet retention Force targets.

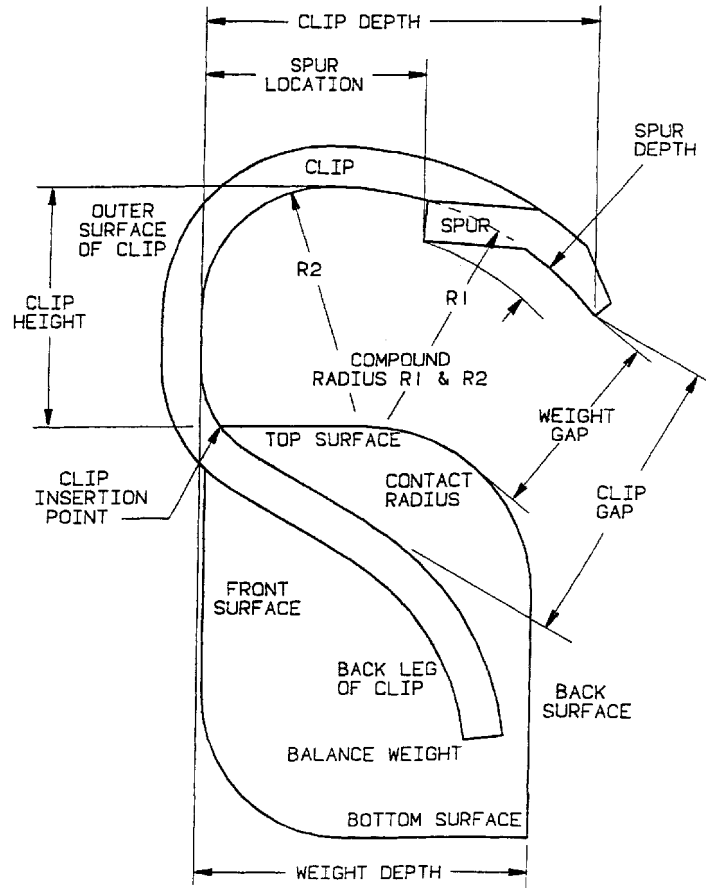

**Figure 1 - Balance weight assembly terminology**